

### REMARKS

In view of the above amendments and following remarks, reconsideration and further examination are requested.

In section 1 on page 2 of the Office Action, the Examiner has maintained the restriction requirement between the product claims and the process claim by expressing that the product as claimed can be made by a process that is materially different than the process as recited in claim 7. Specifically, the Examiner has apparently provided two bases for the restriction requirement.

First, that the product as recited in claim 6, 9 and 10 will exhibit the same properties as a product made by a process including forming the curled portion after the adhesive is cured and while the adhesive is in a cured state.

And second, that the product as recited in claims 6, 9 and 10 will exhibit the same properties as a product made by a process including forming the curled portion after the adhesive is cured and after the cured adhesive has been uncured or softened to some degree.

By the current Amendment, claims 6, 9 and 10 have been amended to recite that the curled portion is formed "while the adhesive between said plural wound layers is in a non-cured state". Similarly, method claim 7 now recites "curling an edge of at least one of said two open ends while the adhesive between said layers is in a non-cured state". Along with these amendments, the restriction requirement is again traversed.

Initially, it is respectfully submitted that these amendments render the second basis for the restriction requirement as expressed above no longer applicable. Additionally, it is respectfully submitted that the product as recited in claims 6, 9 and 10 **cannot** be made by forming the curled portion after the adhesive is cured and while the adhesive remains in a cured state, whereby the first basis for the restriction requirement as expressed above is overcome.

Specifically, a curled portion formed while the adhesive is in a non-cured state will exhibit properties that are different from those exhibited by a curled portion formed while the adhesive is in a cured state. First, a curled portion formed while the adhesive is in a non-cured state will result in the adhesive being continuous in its cured state throughout the curled portion, whereas a curled portion formed while the adhesive is in a cured state will result in the cured adhesive exhibiting cracks or fractures thereof in the curled portion. Second, when the curled portion is formed while the adhesive is in a non-cured state, the layers of the paper sheets will be completely bonded to each other

when the adhesive achieves a cured state, whereas when the curled portion is formed while the adhesive is in a cured state, the layers of the paper sheet will become separated from one another and will not be completely bonded to one another. This demonstrates that the product as now claimed in claims 6, 9 and 10 **cannot** be made by a process that is different than the process as recited in claim 7.

Accordingly, because the two bases for the restriction requirement have been removed, since the product as now claimed cannot be made by a process that is different than the process as recited in claim 7, it is respectfully submitted that the restriction requirement is no longer proper and should be withdrawn.

In section 3 on pages 2-3 of the Office Action, the Examiner rejected claim 6 under 35 U.S.C. 102(b) as being anticipated by Beran et al. (GB 492,163). In section 5 on pages 3-4 of the Office Action, the Examiner rejected claims 9 and 10 under 35 U.S.C. 103(a) as being unpatentable over Beadle in view of Wilcox. And, in section 6 on page 4 of the Office Action, the Examiner rejected claims 9 and 10 under 35 U.S.C. 103(a) as being unpatentable over Beadle in view of Wilcox and Carpenter.

Beran et al., Beadle, Wilcox and Carpenter are not applicable with regard to the newly amended claims for the following reasons.

Each of rejected claims 6, 9 and 10 now recite

a roll of paper having...an outer circumferential surface...and  
a curled portion... wherein said curled portion is angled radially  
outwardly relative to said outer circumferential surface

Similarly, method claim 7 recites

angling said curled portion radially outwardly relative  
to said outer circumferential surface

The significance of having the curled portion be angled radially outwardly relative to the circumferential surface of the roll of paper is that this allows the roll of paper to be joined to either the cover plate 7 or the bottom plate 8 more closely while being covered with respective tightening bands 9 and 10. This eliminates the need of specific seals or packings.

The curled portions of Beran are **not** angled radially outwardly relative to an outer circumferential surface of the sleeve or roll of fibrous material thereof. The curled portion of

Carpenter is **not** angled radially outwardly relative to the outer circumferential surface of shell 10. The curled portion of Wilcox is **not** angled radially outwardly relative to the outer circumferential surface of the cylindrical body thereof. And, the curled portion of Beadle is **not** angled radially outwardly relative to the outer circumferential surface of the cylindrical vessel body thereof. Accordingly, because none of Beadle, Wilcox, Carpenter and Beran disclose or suggest a curled portion that is angled radially outwardly relative to an outer circumferential surface of a cylindrical body, claims 6-13 are allowable over these references either taken alone or in combination.


Additionally, claims 11, 12 and 13 each recite that the curled portion comprises a **pressed** curled portion. Similarly, method claim 8 recites **pressing said curled portion**. The significance of the pressed curled portion is that such a pressed curled portion will strengthen the cylindrical body 1 as compared with a non-pressed curled portion. None of Beadle, Wilcox, Carpenter and Beran expressly teach or suggest such a "pressed" curled portion, and accordingly, claims 8, 11, 12 and 13 are each patentable in their own right over these references either taken alone or in combination.

In view of the above amendments and remarks, it is respectfully submitted that the present application is in condition for allowance and an early Notice of Allowance is earnestly solicited.

If after reviewing this Amendment, the Examiner believes that any issues remain which must be resolved before the application can be passed to issue, the Examiner is invited to contact the Applicant's undersigned representative by telephone to resolve such issues.

Respectfully submitted,

Motoharu KASUYA

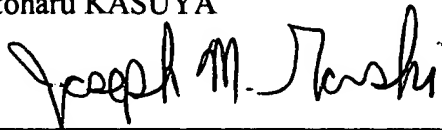By: 

Joseph M. Gorski  
Registration No. 46,500  
Attorney for Applicants

JMG/lah  
Washington, D.C. 20006-1021  
Telephone (202) 721-8200  
Facsimile (202) 721-8250  
March 4, 2002

## Version With Markings to Show Changes Made

6. (Amended) A cylindrical body of a fiber drum, comprising:

a roll of paper having two open[ing] ends and an outer circumferential surface, plural wound layers with a cured adhesive between said plural wound layers, and a curled portion at at least one of said two open[ing] ends, wherein said curled portion is angled radially outwardly relative to said outer circumferential surface,

wherein said curled portion is formed by inwardly curling an edge of said at least one of said two open[ing] ends [before] while the adhesive between said plural wound layers [cures] is in a non-cured state.

7. (Amended) A method of fabricating a cylindrical body of a fiber drum, comprising:

winding a length of a paper sheet into layers such that a roll having two open[ing] ends and an outer circumferential surface is formed, with an adhesive existing between said layers;

inwardly curling an edge of at least one of said two open[ing] ends [before] while the adhesive between said layers [cures] is in a non-cured state, thereby forming a curled portion at said at least one of said two open[ing] ends; [and then]

then curing the adhesive between said layers; and

angling said curled portion radially outwardly relative to said outer circumferential surface.

9. (Amended) A fiber drum comprising:

a roll of paper having two open[ing] ends and an outer circumferential surface, plural wound layers with a cured adhesive between said plural wound layers, and a curled portion at each of said two open[ing] ends, wherein said curled portion is angled radially outwardly relative to said outer circumferential surface and is formed by inwardly curling a respective edge of said two open[ing] ends [before] while the adhesive between said plural wound layers [cures] is in a non-cured state;

a paper material cover plate detachably joined to said curled portion at one of said two open[ing] ends such that the opening at said one of said two open[ing] ends is closed; and


a paper material bottom plate fixedly joined to said curled portion at the other of said two open[ing] ends such that the opening at said other of said two open[ing] ends is closed.

10. (Amended) A fiber drum comprising:

a roll of paper having two open[ing] ends and an outer circumferential surface, plural wound layers with a cured adhesive between said plural wound layers, and a curled portion at each of said two open[ing] ends, wherein said curled portion is angled radially outwardly relative to said outer circumferential surface and is formed by inwardly curling a respective edge of said two open[ing] ends [before] while the adhesive between said plural wound layers [cures] is in a non-cured state;

a paper material cover plate detachably joined to said curled portion at one of said two open[ing] ends such that the opening at said one of said two open[ing] ends is closed; and

a paper material bottom plate fixedly joined to said curled portion at the other of said two open[ing] ends such that the opening at said other of said two open[ing] ends is closed, wherein the curled portion at said other of said two open[ing] ends is formed by inwardly curling the edge of said other of said two open[ing] ends together with a circumferential edge of said paper material bottom plate, [before] while the adhesive between said plural wound layers [cures] is in a non-cured state, to fixedly join said edge of said other of said two open[ing] ends to said paper material bottom plate.



Version with Markings to  
Show Changes Made

FIBER DRUM, CYLINDRICAL BODY THEREOF, AND  
METHOD OF FABRICATING THE CYLINDRICAL BODY

BACKGROUND OF THE INVENTION

Field of the Invention

5 (001) The present invention relates to a fiber drum made mainly of a paper material, a cylindrical body of the paper material constituting the fiber drum, and a method of fabricating the cylindrical body.

Prior Art of the Invention

10 (000) One of such conventional cylindrical bodies of a fiber drum is illustrated in Fig. 13. The cylindrical body consists mainly of a roll B of a paper sheet S having a bottom at one end. The roll B has an opening C thereof at the other end and <sup>on</sup> ~~its~~ <sup>thereat</sup> edge is inwardly curled together with a metal ring E thus forming an inwardly curled rim F.

15 (003) The metal ring E has an inward rib G at an intermediate portion thereof projected substantially 10 mm inwardly of the roll B.

20 (004) As the cylindrical body A has the paper sheet S and the metal ring E curled together, its curled rim F will particularly require more labor and time to be disassembled <sup>during a</sup> ~~in the~~ recycling process. Also, the rim F has to be further separated into the metal ring E and the paper sheet S with extra labor. Once an amount of powder or grains is directly  
25 loaded into the fiber drum with no use of any inner bag,

TC 3700 MAIL ROOM

MAR - 8 2002

RECEIVED

<sup>a</sup> of the powder or grains  
its portion may be trapped by the inward rib G and the inwardly  
curled rim F of the cylindrical body A and ~~fail~~ <sup>thus be failed</sup> to be removed  
out from the drum.

(~~con~~) We, the inventors, have proposed a modified fiber drum  
disclosed in Japanese Patent Laid-open Publication  
2000-185724 as shown in Fig. 14. A cylindrical body A2 of  
the fiber drum shown in Fig. 14 comprises a roll B2 having  
a cylindrical shape and made of simply a paper material with  
an adhesive. The roll B2 in its vertical position has  
outwardly curled portions I and J provided on both, upper  
and lower, ends thereof at openings. The cylindrical body  
A2 is accompanied with a cover plate K and a bottom plate  
L both made of a paper material, hence constituting <sup>a</sup> the fiber  
drum D. The cover plate K consists mainly of a top portion  
<sup>having</sup> M of a disk shape and a rim portion N extending perpendicularly  
from the top portion M <sup>being</sup> for detachably <sup>joined</sup> joining to the upper  
curled portion I of the cylindrical body A2. The bottom  
plate L consists mainly of a bottom portion <sup>having</sup> O of a disk shape  
and a rim portion P extending perpendicularly from the bottom  
portion O and bonded by an adhesive to the lower curled portion  
J. The drum is filled with desired objects and then sealed  
~~off~~ at the joint between the rim portion N of the cover plate  
K and the roll B2 with a length of sealing tape (not shown).  
Accordingly, the fiber drum D using no metal material can  
easily be disassembled. Also, as the cylindrical body A2  
has no projection on its inner side, ~~it can allow the contents~~

such as powder ~~to~~ be completely removed ~~out~~ with no residue. *removing the drum*

(0006) However, the body B2 of the fiber drum D shown in Fig. 14 has its inner side turned over the outer side for forming the curled portions I and J. As the material of the inner side is pulled radially of the opening at each end, the curled portion I or J may have a flaw. The flaw will then result in the generation of paper dusts. For compensation, the curled portions I and J after formed are often coated at their surfaces with a resin material or the like. This will result in ~~claim~~ extra labor and cost.

#### SUMMARY OF THE INVENTION

(0007) The present invention has been developed in view of the foregoing aspects and its object is to provide a fiber drum, a cylindrical body thereof, and a method of fabricating the cylindrical body where the physical strength at each opening end of the cylindrical body is substantially high, the contents can be loaded and unloaded *to and from the drum* without difficulty, the separation of a paper material from the others *materials* is not needed, and the injury during the forming or processing *the drum* is minimized.

(0008) For achievement of the object, a cylindrical body of a fiber drum according to the present invention comprises a roll of a paper material having at one opening end and/or the other opening end a curled portion ~~thereof~~ *on* formed by inwardly curling the edge of the one opening end and/or the other opening end. As the curled portion is made of the



same material <sup>that</sup> as of the roll, ~~the~~ physical strength will be increased at ~~about~~ the one opening end or the other opening end. As no metal material is used, ~~the~~ separation of the paper material from metals is unnecessary <sup>during</sup> ~~at the~~ disposal. <sup>of the drum</sup>

5 (1009) A method of fabricating a cylindrical body of a fiber drum according to the present invention is provided, <sup>which method</sup> ~~comprises~~ <sup>comprising</sup> the steps of winding a length of paper sheet into layers, between which an adhesive is applied, to form a roll of the paper sheet, and inwardly curling <sup>on</sup> the edge of one opening ~~ing~~ end and/or the other opening end of the roll to form a curled portion before the adhesive is cured between the layers. As the step of forming the curled portion takes a short <sup>amount</sup> ~~duration~~ of time, the fabrication of the cylindrical body will be <sup>improved with regard to</sup> ~~increased in the~~ efficiency, hence permitting ~~the~~ mass production.

15 (1010) Alternatively, the method of fabricating a cylindrical body of a fiber drum is modified in which the curled portion formed by inwardly curling the edge of one opening ~~ing~~ end and/or the other opening end of the roll is then pressed down. <sup>As</sup> ~~Because~~ <sup>the</sup> the curled portion is inwardly curled, its pressing process will <sup>not</sup> ~~hardly~~ develop flaws <sup>in</sup> on the curled portion as compared with an outwardly curled portion of the prior art.

20 (1011) A fiber drum according to the present invention is provided comprising a cylindrical body having a couple of curled portions provided at one opening ~~ing~~ end and the other opening ~~ing~~ end of a roll of a paper material ~~thereof~~ by inwardly

curling the edges of the one opening end and the other opening  
end of the same, a cover plate made of a paper material  
detachably joined to the curled portion at the one opening  
end to ~~shut up one~~ <sup>close on</sup> opening of the roll of the cylindrical  
5 body, and a bottom plate made of a paper material fixedly  
joined to the curled portion at the other opening end to  
~~shut up~~ <sup>close</sup> the other opening of the roll of the cylindrical  
body. <sup>Because</sup> As the cylindrical body, the cover plate, and the  
bottom plate all are made of the paper material, the  
10 separation of the paper material from other metal materials  
will be unnecessary <sup>during</sup> at the disposal of the fiber drum.

(1002) Another fiber drum according to the present invention  
is provided comprising a cylindrical body having a curled  
portion provided at one opening end of a roll of a paper  
15 material thereof by inwardly curling <sup>as</sup> the edge of the one  
opening end of the same, a cover plate made of a paper material  
detachably joined to the one opening end to ~~shut up~~ <sup>close</sup> one opening  
of the roll of the cylindrical body, and a bottom plate made  
of a paper material fixedly joined to the other opening end  
20 to ~~shut up~~ <sup>close</sup> the other opening of the roll of the cylindrical  
body, wherein the edge of the other opening end of the roll  
is inwardly curled together with the circumferential edge  
of the bottom plate to fixedly join <sup>a</sup> between the other opening  
end of the roll <sup>to</sup> and the bottom plate. The cylindrical body  
25 and the bottom plate are inwardly curled at once, hence  
eliminating a sequence of the steps of forming the

cylindrical body and the bottom plate separately and <sup>then</sup> bonding them together. As the overall number of steps of the method is decreased, <sup>a reduction in</sup> the cost ~~down~~ will be guaranteed. Also, the inner side of the cylindrical body has no projection adjacent to the bottom plate, hence allowing <sup>contents of the drum</sup> the content to be readily discharged without being trapped as compared with the conventional body having an inner rib, <sup>allowing the drum</sup> and to be free from of any residue.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10 (003) Fig. 1 is an external view of the cylindrical body of a fiber drum according to <sup>a first</sup> ~~one~~ embodiment of the present invention;

Fig. 2 is a partially cross sectional front view of the cylindrical body;

15 Fig. 3 is an external view of the fiber drum according to <sup>first</sup> ~~the~~ embodiment of the present invention;

Fig. 4 is an explanatory view illustrating a step of fabricating a green form of the cylindrical body;

20 Fig. 5 is a front view of a forming machine for forming a curled portion <sup>at</sup> on one opening end of the green form of the cylindrical body;

Fig. 6 is a cross sectional front view illustrating a step of forming the curled portion <sup>at</sup> on the one opening end of the green form which is placed on the forming machine;

25 Fig. 7 is an enlarged cross sectional view illustrating the step of forming the curled portion <sup>at</sup> on the one opening

end of the green form;

Fig. 8 is a cross sectional front view illustrating the step of forming the curled portion <sup>at</sup> on the one opening end of the green form where the curled portion is dislocated outwardly by the action of a forming die;

Fig. 9 is a cross sectional front view illustrating a step of forming the curled portion on the one opening end of the green form where the dislocated curled portion is pressed ~~down~~ with a chuck;

Fig. 10 is a cross sectional front view showing partially the bottom of a cylindrical body of a fiber drum according to another embodiment of the present invention;

Fig. 11 is a cross sectional front view showing partially a modification of the bottom of the fiber drum;

Fig. 12 is a cross sectional front view showing partially another modification of the bottom of the fiber drum;

Fig. 13 is an explanatory view showing a step of removing powder from one opening of a conventional fiber drum <sup>that is</sup> tilted; and

Fig. 14 is a partially cross sectional front view of another conventional fiber drum.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

(0014) A first embodiment of the present invention will be described in more detail referring to the relevant drawings.

(0015) Fig. 1 is an external view showing a cylindrical body of a fiber drum of the embodiment. Fig. 2 is a partially

cross sectional front view of the cylindrical body.

(0016) As shown, the cylindrical body 1 of the fiber drum consists mainly of a roll 2 of a paper material with an adhesive. The roll 2 may be made of a plurality of paper sheets or a single sheet of paper which is rolled as will be explained later.

(0017) The roll 2 in its vertical position has an opening 3 thereof provided at the upper end and an opening 4 at the other end. The roll 2 has an upper edge curled inwardly at the one opening 3 forming a curled portion 5 which is oval in ~~the~~ cross section and annular in ~~the~~ plan view as continuous along the circumference. The curled portion 5 is tilted outwardly and radially of the roll 2. The oval cross section of the curled portion 5 is so tightly pressed as to eliminate the hollow space and its thickness is substantially 1 mm greater than the thickness of the roll 2. The lower edge at the other opening 4 of the roll 2 also is inwardly curled to form a curled portion 6 which is identical in ~~the~~ size <sup>that of</sup> to the curled portion 5.

(0018) The cylindrical body 1 having the above arrangement is accompanied, as shown in Figs. 2 and 3, with a cover plate 7 and a bottom plate 8 both made of a paper material, thus constituting <sup>a</sup> the fiber drum D. The cover plate 7 and the bottom plate 8 are ~~arranged~~ <sup>reinforcement</sup> of a disk shape and reinforced at outer edge with ~~reinforce~~ ribs 11 and 12, respectively, which are annular in ~~the~~ plan view. The cover plate 7 and

the bottom plate 8 are detachably mounted to the corresponding curled portions 5 and 6 at the one opening 3 and the other opening 4, respectively. The joints between the cover plate 7 and the curled portion 5 and between the bottom plate 8 and the curled portion 6 are covered with a couple of tightening bands 9 and 10, respectively, to seal off the fiber drum D.

(or) The fiber drum D comprises the cylindrical body 1, the coverplate 7, and the bottom plate 8 made of the paper material, employing no metal. Accordingly, when ~~is~~ out of use and discarded, the fiber drum D requires no traditional separation into paper and metal. As the curled portions 5 and 6 are inwardly curled, they develop no tension towards the radial direction and will be prevented from generation of flaws as compared with ~~the~~ outwardly curled portions. The curled portions 5 and 6 are tilted radially and outwardly of the cylindrical body 2 and can thus be joined to the cover plate 7 and the bottom plate 8 more closely while being covered with their respective tightening bands 9 and 10. This eliminates the need of specific seals or packings. While the curled portions 5 and 6 of the cylindrical body 1 according to the present invention are rigid enough without being pressed down, their pressed-down structure having no hollow space will contribute to <sup>increased</sup> ~~the higher~~ physical strength of the cylindrical body 1. Moreover, because the difference between the curled portions 5 and 6 and the other portion

of the cylindrical body 1 is as small as 1 mm, the inner side of the cylindrical body 1 may be less undulated. Accordingly, any content such as powder can successfully be removed ~~out~~ from the fiber drum D without being trapped.

5 (0000) The present invention is not limited to the embodiment

with the tightening bands provided about the one opening 3 and the other opening 4 for sealing off. For shutting <sup>the drum</sup> ~~off~~ <sup>closing</sup>

~~up~~ the other opening 4 of the cylindrical body 1, the curled portion 6 may be bonded by an adhesive to a bottom member

10 80 which comprises a bottom portion 81 and a flange portion 82 extending from <sup>on</sup> the edge of the bottom portion 81 as shown

in Fig. 11. Similarly, the one opening 3 of the cylindrical body 1 may be ~~shut off~~ <sup>closed</sup> with a cover member (not shown), which

15 comprises a cover portion and a flange portion extending from <sup>on</sup> the edge of the cover portion, bonded to the curled portion 5 by an adhesive.

(0001) A method of fabricating the cylindrical body 1 will now be described.

20 (0002) The method starts with a step of forming a green cylindrical body 1a as shown in Fig. 4. More specifically, a length of paper sheet S coated at its upper side with an adhesive Q before curing is wound in seven to eight layers on <sup>a</sup> the mandrel of a drum forming machine (not shown) to form a roll 2 of the green cylindrical body 1a. The adhesive

25 Q may be any commercially available hydrophilic adhesive composed mainly of e.g. poly-vinyl acetate emulsion or

poly-vinyl alcohol.

(0003) The green cylindrical body 1a is then transferred to <sup>platform</sup> a curled portion forming step which may be carried out by a forming machine M shown in Fig. 5. The forming machine M performs a sequence of three steps, <sup>namely a</sup> (1) the first step of inwardly curling both edges 13a and 13b of the green cylindrical body 1a, (2) <sup>a</sup> the second step of increasing the <sup>-sectional area defined by</sup> cross section of each curled portion <sup>by deforming each curled portion</sup> radially and outwardly, and (3) <sup>a</sup> the third step of pressing down the curled portions.

(0004) The forming machine M has a forming die 15, <sup>a</sup> of having substantially a circular shape in the plan view, placed on a platform 17 supported by the floor bed and fixedly held at an intermediate <sup>portion</sup> of its outer side with an annular chuck support 18. A first chuck 16a and a second chuck 16b which travel forward and backward <sup>along a</sup> on the horizontal <sup>direction</sup> are provided on the upper side of the chuck support 18. The first chuck 16a <sup>is</sup> located <sup>above the second chuck 16b and</sup> on the inner wall thereof for inwardly curling the edge of the roll with its guiding surface 19. The first chuck 16a is at <sup>an</sup> the inner wall below the guide region 19 in direct contact with the outer side of the forming die 15. <sup>An</sup> The inner wall of the second chuck 16b <sup>which is</sup> located <sup>between the first chuck 16a,</sup> lower is a <sup>tapered</sup> surface 20 which is tilted to increase <sup>in</sup> the opening towards the lower end <sup>tapered a</sup> of the second chuck <sup>16b</sup> and is opposite to a <sup>tapered</sup> surface 21 of the outer side of the forming die 15 tilted at the same angle. A vertically movable pressing member 14 is provided precisely above the forming



die 15 for pressing down the green cylindrical body against the forming die 15.

(0025) <sup>operation</sup> In ~~action~~, the roll 2 of the layers of the paper sheet S before the adhesive Q is cured is loaded and placed upright on the guide region 19 of the first chuck 16a so that <sup>the</sup> ~~its~~ edge 13a at the one opening 3 sits directly on the guide region 19, as shown in Fig. 6. While Fig. 6 illustrates the edge at the one opening 3 for simplicity of the description, the edge at the other opening 4 of the roll 2 can also be shaped after <sup>turning the roll 2</sup> ~~turned~~ up side down.

(0026) As the pressing member 14 is then <sup>lowered</sup> ~~lifted~~ down, the edge 13a of the roll 2 is pressed down between the guiding surface 191 of the guide <sup>region</sup> ~~portion~~ 19 and the outer side 22 of the forming die 15 to <sup>form</sup> ~~turn~~ to an inwardly curled portion <sup>as</sup> shown in Fig. 7.

(0027) When pressed down, the inner layers of the paper sheet S of the green cylindrical body 1a lag behind the outer layers due to a difference in the curvature radius at the curled portion 5 or 6. The layers of the paper sheet S when curled are not separated but remain bonded to each other by the action of the adhesive Q. Also, the adhesive serves as a lubricant to assist the lagging. Simultaneously, as the layers of the paper sheet S are curled, portions of the adhesive Q between the layers of the edge 13a of the green cylindrical body 1a are squeezed out, hence running over the inner side of the roll 2. As a result, <sup>these</sup> ~~the~~ portions of the

adhesive Q may contribute to the higher <sup>adhesiveness</sup> ~~adhesivity~~ and when cured, the improved rigidity of the curled portions 5 and 6.

(0098) By the above manner, the curled portions 5 and 6 of the roll 2 are formed at the one opening 3 and the other opening 4, respectively. As known, the curled portions 5 and 6 are instantly formed in a sequence. Then, as the adhesive Q is cured between the layers of the paper sheet ~~into a~~ <sup>cured</sup> ~~thus to turn to an~~ adhesive Qa, the curled portions 5 and 6 are increased in the rigidity.

(0099) This is followed by retracting the first chuck 16a from the curled portion 5 and 6 <sup>lowering</sup> ~~and lifting down~~ the pressing member 14 further as shown in Fig. 8. As moved along the ~~tapered~~ <sup>tapered</sup> surface 21 of the outer side of the forming die 15, the curled portion 5 is turned outwardly. If the tilting angle is too large, the curled portion 5 may have flaws extending radially. When the tilting angle is too small, the effect of a tightening band or the like will be ~~diminished~~ <sup>diminished</sup>. It is <sup>thus</sup> ~~hence~~ essential to determine an appropriate angle of the tilting for ensuring the effect of the tightening band and eliminating the generation of flaws.

(0099) As shown in Fig. 9, the tilted curled portion 5 is held <sup>in contact</sup> ~~directly~~ with the <sup>tapered</sup> ~~taper~~ surface 21 of the forming die 15, and then the second chuck 16b is advanced in the direction X denoted by the arrow in Fig. 9 to press down the curled portion 5. Any hollow space in the curled portion 5 may

~~decline~~  
<sup>decrease</sup>

the physical strength at the opening of the roll

2. The pressing down of the curled portion 5 may require a pressing force of 30 tons. The cylindrical body 1a of this embodiment is rigid enough and its physical strength may be increased by pressing down the curled portions 5 and 6 to eliminate any hollow spaces.

(003) As explained above, the three steps for forming, tilting, and pressing the curled portions 5 and 6 are carried out in the single forming machine M, which thus contributes to the down sizing and the simpler arrangement of the fabricating system.

(003a) The present invention is not limited to the curled portions 5 and 6 provided on the edges at the openings 3 and 4 of the roll 2, but may be implemented with a curled portion 23 formed by inwardly curling the edge at the bottom opening 4 of the roll 2 together with the edge of the disk bottom plate 8 made of the same paper material thus to constitute the cylindrical body 1 of a fiber drum D2 as shown in Fig. 10. Similar to the first embodiment, the curled portion 23 is also pressed down to eliminate any hollow space. This embodiment is identical in the other arrangements to the first embodiment.

(003b) As the roll 2 and the bottom plate 8 are inwardly curled at their edges at one time, the method of fabricating the fiber drum D2 can significantly be simplified and thus is favorable for mass production <sup>by</sup> decreasing the production

costs. The curled portion 23 is pressed down and its physical strength will be increased to a desired level, thus eliminating the need of extra reinforcement members of a metal material. This requires no separation into the paper material and the metal material <sup>during</sup> at the disposal <sup>of the drum</sup>. Also, the cylindrical body 1 has no projection on the inner side thereof, and thus allows any powder <sup>in the drum</sup> of the content to be readily removed out without being trapped.

(0031) Alternatively, the curled portion 5 at the opening 3 may be replaced by a curled portion F formed by inwardly curling the edge at the bottom opening 4 of a roll 2 together with a metal ring E and a bottom plate 27 of the same paper material as shown in Fig. 12. More particularly, the edge of the bottom plate 27 is sandwiched between the edge and an inward rib G of the roll 2.

(0035) In this embodiment, no metal is used at the upper opening 3 of the roll 2. Accordingly, the separation of a fiber drum into the paper material and the metal material is less troublesome than that of the conventional fiber drum having metal materials at both ends. This embodiment will contribute to the reduction of the industrial waste.

(0039) The cover plate 7 and the bottom plate 8 of each fiber drum are not limited to the paper material but may be made of synthetic resin, metal, veneer plywood, or any other appropriate material.

(0043) It is also a good idea that when the adhesive <sup>Q</sup> is about

cured before the curled portions 5 and 6 are completely shaped,  
the body is heated up for softening the adhesive <sup>Q</sup> between  
the layers of <sup>the</sup> its paper sheets. If the adhesive <sup>Q</sup> is of a  
hot melting type, it has to be heated to higher than its  
melting point.

5

## ABSTRACT OF THE DISCLOSURE

A cylindrical body of a fiber drum comprises a roll of a paper material having two opening ends<sup>\*</sup> and a curled portion formed by inwardly curling the edge of at least one of <sup>the</sup> said two opening ends. A method of fabricating <sup>the</sup> said fiber drum comprises the steps of winding a length of paper sheet in layers, between which an adhesive is applied, to form a roll of the paper sheet having two opening ends, and inwardly curling the edge of at least one of <sup>the</sup> said two opening ends of the roll to form a curled portion before the adhesive is cured between the layers.

Fig.10

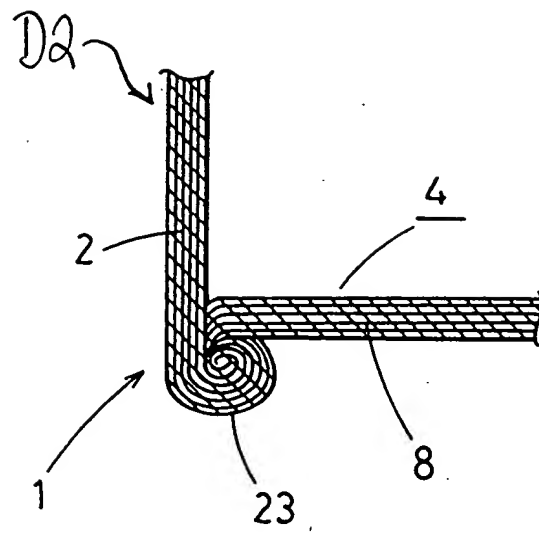


Fig.11

